

BEETLE FIBER OPTICS

OTDR Module

- Out-of-band OTDR monitoring
- In-Line measuring of fiber status using filtered 1625nm
- Non intrusive measurements



Features

- 3 ports
- 100% passive solution - no power needed
- operating temperature 0°C° to +70°C
- High Isolation [only product on the market]
- 19inch rack mountable
- 100% protocol independent


Applications

- In-Line monitoring of live fiber links
- Measurement of dark fiber links

Specification

- 1/2 HU
- High Isolation [>25dB]
- In-Out: 1260 - 1620nm
- OTDR Port: 1625 - 1650nm

configuration example

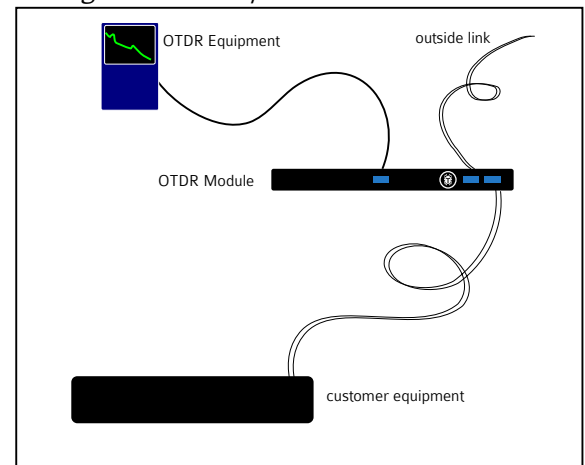

BEETLE FIBER OPTICS

Made in The Netherlands
100% quality control
100% compliance testing
24 months warranty

Find us online at:
www.beetlefiberoptics.com
or send us an email at:
info@beetlefiberoptics.com

